

Cargo Side Loader

CSL


800lb weight capacity



Equipped with sides that fold down, access cargo easily and safely. An innovative solution for trash collection, general maintenance, and carrying various types of cargo with an 800lb weight capacity. **OSHA approved.** Customization is available to create the perfect trailer for any job.

- Water resistant 2" deep liquid collection area at the bottom of the trailer body, with two built-in gasketed stainless steel drains.
- Equipped with an easy-to-install bungee net that, when installed, increases the volume of the trailer by approximately 1/3.
- 4-wheel steering.

- Each component is powder coated for durability, corrosion and abrasion resistance, ease of maintenance and overall toughness.
- Equipped with removable steering arm.
- Tig welded, all aluminum body is .125" thick; aluminum floor is .1875".
- · Equipped with two rubber wheel chocks.

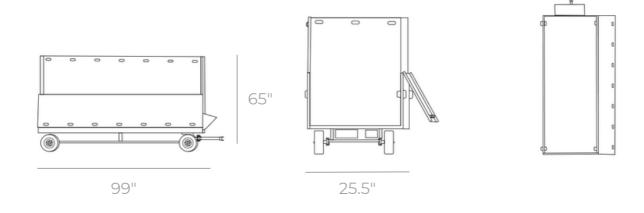

Cargo Side Loader 40"

SPECS	
Overall Length	99"
Overall Width	25.5"
Height	34"
Wheel base	65"
Ground clearance	3"
Aisle and "T" Intersection Turning Radius	48"
Outside turning radius	12'
Weight	143 lbs.

Cargo Side Loader 72"

SPECS	
Overall Length	122"
Overall Width	25.5"
Height	34"
Wheel base	65"
Ground clearance	3"
Aisle and "T" Intersection Turning Radius	54"
Outside turning radius	15.83'
Weight	195 lbs.

^{*}Specifications are subject to change without notice. Copyright c2020, METrans, LLC. All Rights Reserved.











Locking Cage Cart





800lb weight capacity



Designed to safely transport cargo while passing through security checkpoints with ease. **Comes standard in 40" and 72".** Custom length sizing is available for optimal shelving and storage for any duty.

- Equipped with two rubber wheel chocks.
- **Key-locking aluminum doors** on each side provide the ability to completely open each side of the trailer for fully transparent loading, transport, and unloading.
- Entire mesh body is made of reinforced powder coated aluminum wire mesh.
- Equipped with a removable steering arm.
- Fully tig welded, 14-gauge steel, powder coated 4-wheel steering chassis.

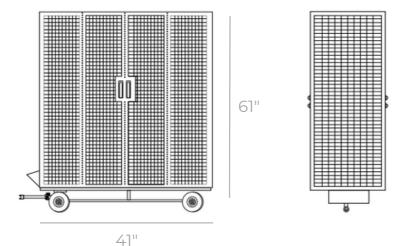



27"

Locking Cage Cart 40"

SPECS	
Overall Length	40"
Overall Width	26"
Height	61"
Wheel base	34"
Ground clearance	2.5"
Aisle and "T" Intersection Turning Radius	48"
Outside turning radius	12'
Weight	180lbs.

Locking Cage Cart 72"

SPECS	
Overall Length	122"
Overall Width	27"
Height	61"
Wheel base	65"
Ground clearance	2.5"
Aisle and "T" Intersection Turning Radius	54"
Outside turning radius	15.83'
Weight	280 lbs.

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.











Flatbed Trailer








This stainless-steel flatbed provides unrestricted, easy loading/unloading of cargo in confined areas. **Comes standard in 40" and 72".**


- Equipped with removable steering arm.
- Sturdy steel, removable, square tube end panels, steel bracing secure each end of the SS cargo deck of the trailer for ease of access and positive locking when moving.
- Fully tig welded, 14-gauge steel, powder coated **4-wheel steering** chassis.
- 16-gauge stainless steel deck along full area of trailer.

35"

 end bracing is tig welded, 14-gauge square tubing, powder coated for durability, corrosion and abrasion resistance, ease of maintenance and overall toughness.







45"

25.5"

Flatbed Trailer 40"

SPECS	
Overall Length	45"
Overall Width	25.5"
Height	35"
Wheel base	34"
Ground clearance	2.5"
Aisle and "T" Intersection Turning Radius	48"
Outside turning radius	12'
Weight	105lbs.

Flatbed Trailer 72"

SPECS	
Overall Length	76.5"
Overall Width	25.5"
Height	35"
Wheel base	65"
Ground clearance	2.5"
Aisle and "T" Intersection Turning Radius	54"
Outside turning radius	15.83'
Weight	130 lbs.

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.











Cargo Tailgate










With a tailgate that drops to the ground, this trailer makes it very easy to load up any type of cargo. Great for many different types of applications and has an 800lb weight capacity. **Comes standard in 40" and 72".**

- Fully folding tailgate provides easy loading and unloading, each with shock absorbing rubber bumpers.
- Sturdy bracket and tethered locking swivel eye snap secure tailgate.
- Tig welded, aluminum body is .125" thick; aluminum floor and tailgate are .1875" thick, with each component fully powder coated for durability, corrosion resistance, ease of maintenance and toughness.
- Water-resistant 4" deep liquid collection area at the bottom of each trailer, with two built-in gasketed stainless steel drains.
- Fully tig welded, 14-gauge steel, powder coated 4-wheel steering chassis.
- Equipped with a **removable steering arm**.
- Comes with two rubber wheel chocks.
- Equipped with an easy-to-install bungee net that, when installed, increases the volume of the trailer by approximately 1/3.







Cargo Tailgate 40"

SPECS	
Overall Length	99"
Overall Width	25.5"
Height	33.5"
Wheel base	65"
Ground clearance	2.5"
Aisle and "T" Intersection Turning Radius	48"
Outside turning radius	12'
Weight	143lbs.

Cargo Tailgate 72"

SPECS	
Overall Length	72"
Overall Width	25.5"
Height	33.5"
Wheel base	65"
Ground clearance	2.5"
Aisle and "T" Intersection Turning Radius	54"
Outside turning radius	15.83'
Weight	200 lbs.

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.











Toolbox Trailer










Designed to carry and transport a standard duty toolbox, making it an efficient way to store and access your tools. When utilized with our vehicles, this trailer becomes the perfect tool for your facility.

- Equipped with a place to securely store ladder at the end of the trailer for easy access.
- Easily and quickly access tools and equipment with the toolbox trailer.
- Designed with locking drawers in order to safely and securely store tools and equipment.
- Equipped with removable steering arm.







Toolbox Trailer

SPECS	
Overall Length	36"
Overall Width	19"
Height	38"
Wheel base	26.5"
Ground clearance	3.25"
Aisle and "T" Intersection Turning Radius	30"
Outside turning radius	60"

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.













Lifting Deck








Ideal for towing heavy equipment on casters. Easily roll equipment on to deck and raise using winch, to transport up to 800lbs across your facility.

- 16-gauge stainless steel deck along full area of trailer.
- Rigid lifting platform keeps equipment ground level during loading and transport.
- Equipped with removable steering arm.
- End bracing is tig welded, 14-gauge square tubing, powder coated for durability, corrosion and abrasion resistance, ease of maintenance and overall toughness.

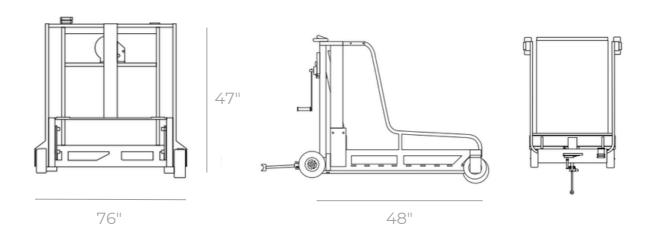

Lifting Deck Trailer

SPECS	
Overall Length	76"
Overall Width	48"
Height	47"
Wheel base	55"
Ground clearance	3"
Aisle and "T" Intersection Turning Radius	82"
Outside turning radius	25'
Weight	350lbs.

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.













Server Lifter

SL



Specifically designed and tested for operation in all data center environments, including aluminum floors. This manual lifter, which can be towed by the MT700 vehicle, ensures accurate alignment of equipment and eliminates risk to personnel and equipment.

- Easy loading/unloading in confined areas within Data Centers
- Stable, super maneuverable operation virtually anywhere a person can walk, including elevators.
- Easy transport of most IT equipment components throughout the Data Center, with its **650lb. cargo weight limit.**
- Balloon Tires (optional foam filled) for safe use on raised floors.
- Constructed of Tig Welded aluminum for lighter weight and lower center of gravity of the trailer.
- Weight capacity of shelf pull-out slides and plastic-topped equipment deck is 650lb.
- Pre-attached aluminum mounting/tiedown brackets on each plastic-topped equipment deck permit any load to be secured for transport, and easily assessable when securing IT equipment.









Manual Tandem Lift

By combining the use of the MT700 vehicle to tow the Manual Tandem Lift as a trailer, the speed at which IT equipment is transported is greatly increased. Specifically designed and tested for operation in all data center environments, including aluminum floors. This manual lifter allows for removing server cabinet IT equipment and installing replacement equipment in one operation.

- Easy loading/unloading in confined areas within Data Centers
- Stable, super maneuverable operation virtually anywhere a person can walk, including elevators.
- Easy transport of most IT equipment components throughout the Data Center, with its **650lb. cargo weight limit.**
- Balloon Tires (optional foam filled) for safe use on raised floors.
- Constructed of Tig Welded aluminum for lighter weight and lower center of gravity of the trailer.
- Weight capacity of shelf pull-out slides and plastic-topped equipment deck is 650lb.
- Pre-attached aluminum mounting/tiedown brackets on each plastic-topped equipment deck permit any load to be secured for transport, and easily assessable when securing IT equipment.

Workbench

The METransport Work bench can be used as a trailer towed by the MT700 vehicle and/or operated independently as a fully controlled 4-wheel steering cart in data center environments. The work bench has a load capacity of 400 lbs. and ample room for tools, test equipment, and replacement parts. Equipped with a high, shock deadening, antistatic, hard neoprene rubber work surface.







Manual Tandem Lift

SPECS	
Overall Length	84"
Overall Width	30"
Height	96"
Wheel base	65"
Ground clearance	יין
Aisle and "T" Intersection Turning Radius	56"
Outside turning radius	156"
Weight	390"

Workbench

SPECS	
Overall Length	47"
Overall Width	21"
Height	36"
Wheel base	26.5"
Ground clearance	ן"
Aisle and "T" Intersection Turning Radius	30"
Outside turning radius	60"
Weight	94"

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.












Server Lifter


SL




Specifically designed and tested for operation in all data center environments, including aluminum floors. This manual lifter, which can be towed by the MT700 vehicle, ensures accurate alignment of equipment and eliminates risk to personnel and equipment.

- Easy loading/unloading in confined areas within Data Centers
- Stable, super maneuverable operation virtually anywhere a person can walk, including elevators.
- Easy transport of most IT equipment components throughout the Data Center, with its **650lb. cargo weight limit.**
- Balloon Tires (optional foam filled) for safe use on raised floors.
- Constructed of Tig Welded aluminum for lighter weight and lower center of gravity of the trailer.
- Weight capacity of shelf pull-out slides and plastic-topped equipment deck is 650lb.
- Pre-attached aluminum mounting/tiedown brackets on each plastic-topped equipment deck permit any load to be secured for transport, and easily assessable when securing IT equipment.







26.5"

Server Lifter 48U

SPECS	
Overall Length	60"
Overall Width	26.5"
Height	79"
Wheel base	32.5"
Ground clearance	1"
Aisle and "T" Intersection Turning Radius	44"
Outside turning radius	72"
Weight	213lbs.

Server Lifter 52U

SPECS	
Overall Length	132"
Overall Width	30"
Height	9"[9
Wheel base	65"
Ground clearance	ן"
Aisle and "T" Intersection Turning Radius	44"
Outside turning radius	72"
Weight	213lbs.

^{*}Specifications are subject to change without notice. Copyright @2020, METrans, LLC. All Rights Reserved.













General Utility


TR400

800lb weight capacity



This stainless-steel trailer is highly maneuverable and has an increased carrying capacity. Perfect for efficiently transporting various types of cargo through small spaces.

- Provides significant volume and weight carrying capacity in a small scale, highly maneuverable trailer.
- Equipped with a place for hooks along the sides of the trailer.
- The workbench has a load capacity of 400lbs and ample room for tools, test equipment, cabling, and replacement parts.
- High, shock deadening, anti-static, hard neoprene rubber work surface.
- Equipped with removable steering arm.

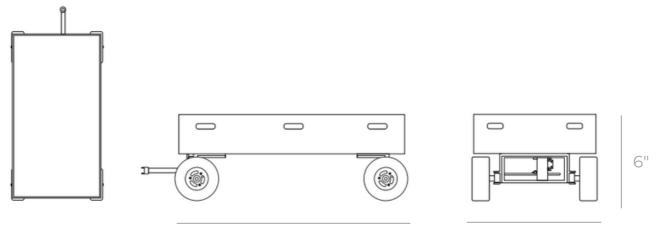

34" 21"

General Utility Trailer

SPECS	
Overall Length	34"
Overall Width	21"
Height	6"
Wheel base	26.5"
Ground clearance	3.25"
Aisle and "T" Intersection Turning Radius	30"
Outside turning radius	60"
Weight	358 lbs.

^{*}Specifications are subject to change without notice. Copyright ©2020, METrans, LLC. All Rights Reserved.





